




iMac G5 20" Model A1145 RAM Replacement

Written By: Andrew Bookholt

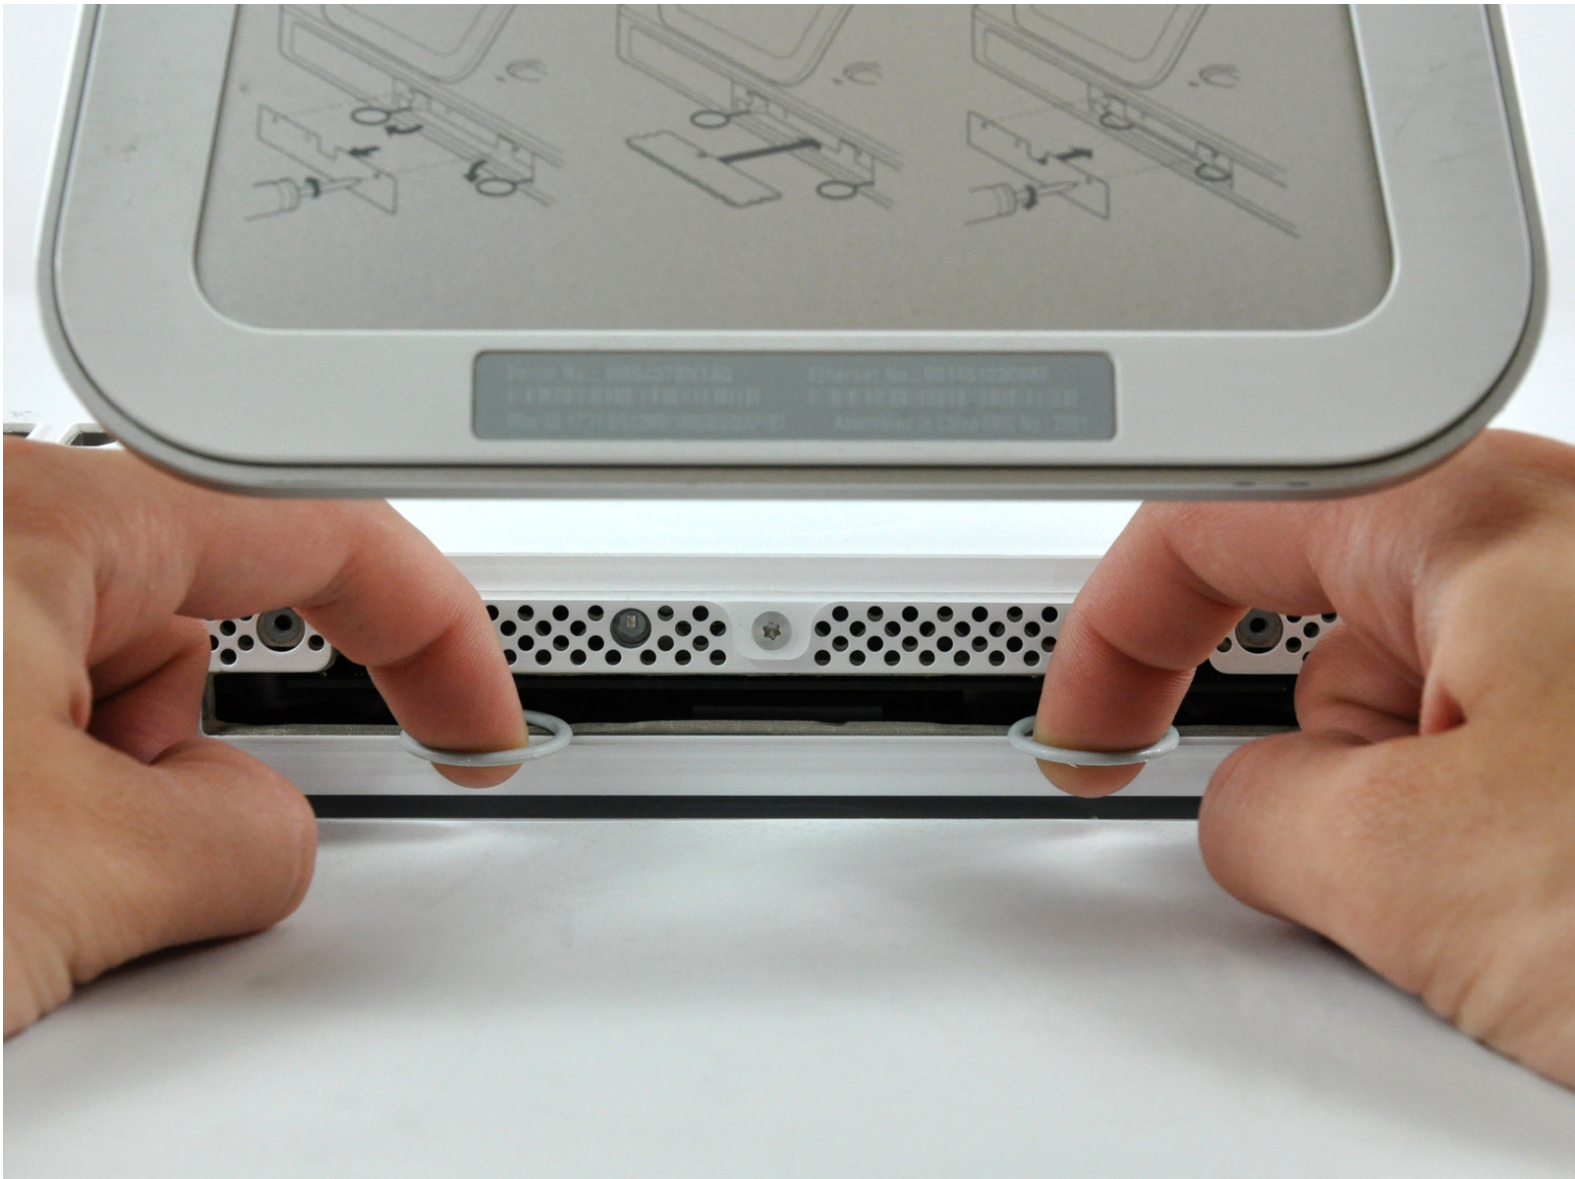

INTRODUCTION

Upgrade your RAM for an instant increase in speed.



TOOLS:

- [Phillips #1 Screwdriver](#) (1)





PARTS:

- [PC2-4200 2 GB RAM Chip \(Desktop\)](#) (1)

Step 1 — Access Door



- Orient the iMac face-side down on a table with the bottom edge facing yourself.
 - Remove the two Phillips screws securing the access door to the bottom grille of your iMac.
-  The screws are captive in the access door.


 **Before beginning the repair, unplug the computer and press and hold the power switch for 20-30 seconds, to discharge internal capacitors.**

Step 2




- Remove the access door.

Step 3 — RAM

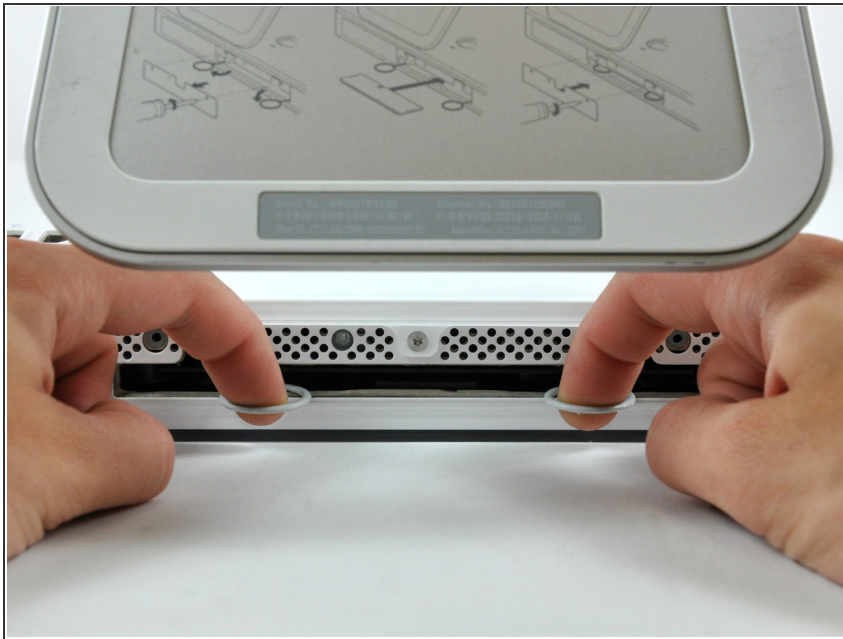

- Insert your fingers into the two RAM arms and pull both arms toward yourself to eject the RAM chip.

Step 4

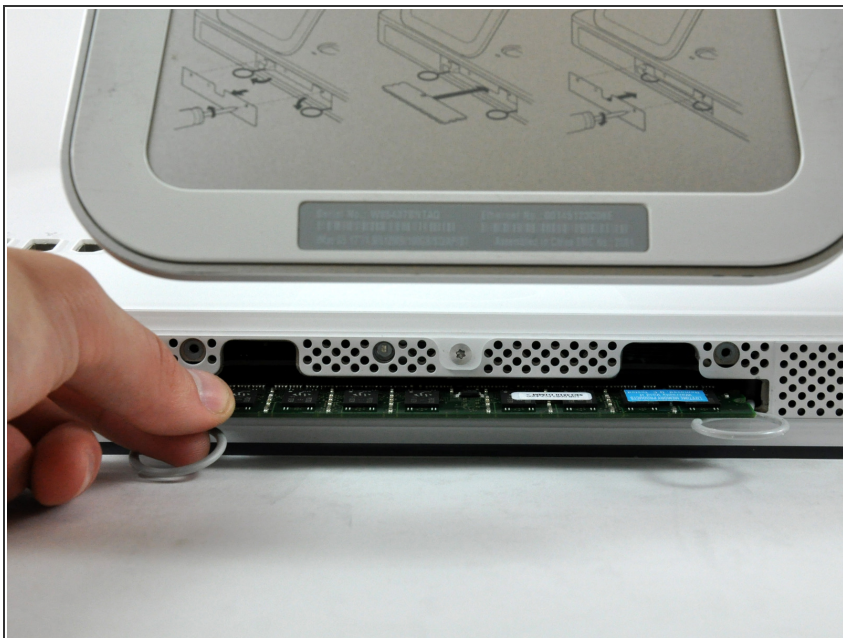

- Slide the RAM chip straight out of its socket.
- ⓘ Make sure both RAM arms are fully rotated outward before reinstalling your RAM chip.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 07:04:38 AM.